


TECHNICAL DATA

Rated voltage	230 VAC
Rated power output	150 W/m ²
Max operation temperature	80 °C
Minimal operation temperature	-10 °C
Minimal storage temperature	-20 °C
Minimal installation temperature	-10 °C
Cold lead (braided) length	1 x 4 m
Cable diameter	1,18 – 1,62 mm
Cold lead cross section	
	till 4m ² 2x0,5 mm ²
	from 5m ² till 9m ² 2x0,75 mm ²
	10m ² 2x1,0 mm ²

Rolled on cardboard roll Ø 40 mm and packaged in clear plastic bag

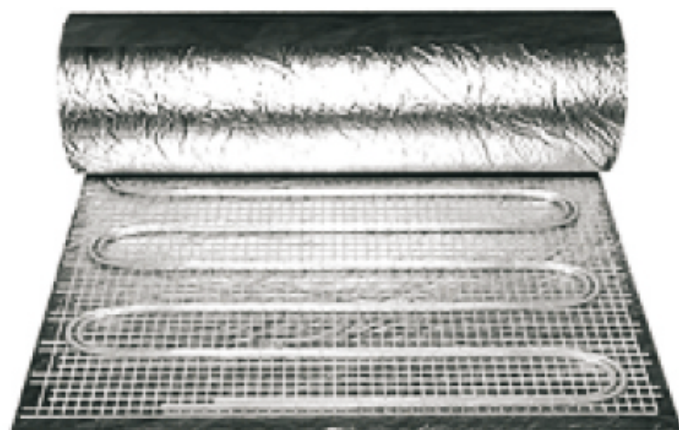


Aluminum stripe (width 50 mm) included in plastic bag.
 for sizes 1 m² to 5 m²: 1 m length
 for sizes 6 m² to 10 m²: 2 m length

DOUBLE CORE HEATING MAT		150W/m ²	
Type	Area m ²	Power W	Resistance W
FMD-75-0.50	0.5	75	665,80 – 771,10
FMD-112-0.75	0.75	112	399,30 – 462,66
FMD-150-1.0	1.0	150	342,36 – 396,57
FMD-225-1.5	1.5	225	217,80 – 252,45
FMD-300-2.0	2.0	300	154,98 – 179,95
FMD-450-3.0	3.0	450	103,40 – 120,70
FMD-600-4.0	4.0	600	79,26 – 91,77
FMD-750-5.0	5.0	750	62,04 – 73,41
FMD-900-6.0	6.0	900	52,32 – 61,15
FMD-1050-7.0	7.0	1050	41,23 – 47,74
FMD-1200-8.0	8.0	1200	36,23 – 41,96
FMD-1350-9.0	9.0	1350	31,58 – 36,57
FMD-1500-10.0	10.0	1500	28,81 – 33,36

CABLE DESIGN



MARKING

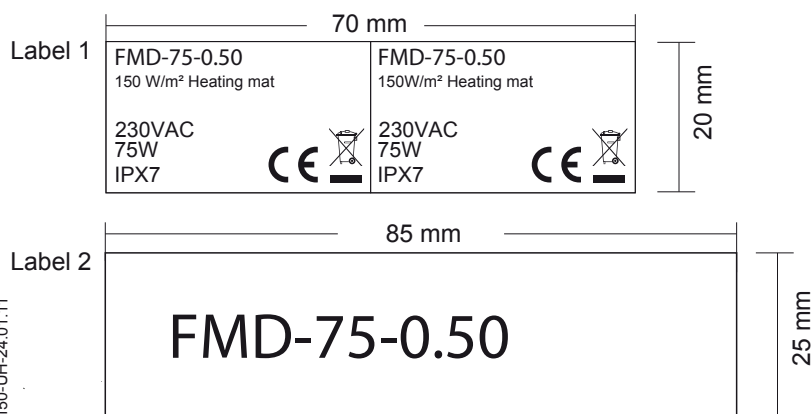

Label 2 placed visibly inside the bag

